




Polishing Table

2 Station Polishing Table

- Independent light controller for hood.
- Heavy suction motor.
- Strong polishing motor 2 station.
- Hapa filter for fine collection.
- Primary filter for independent dust collection
- Special design silencer for noise reduction.
- Locking system for filter cartridge.
- Strong metal top with two number of drawers.

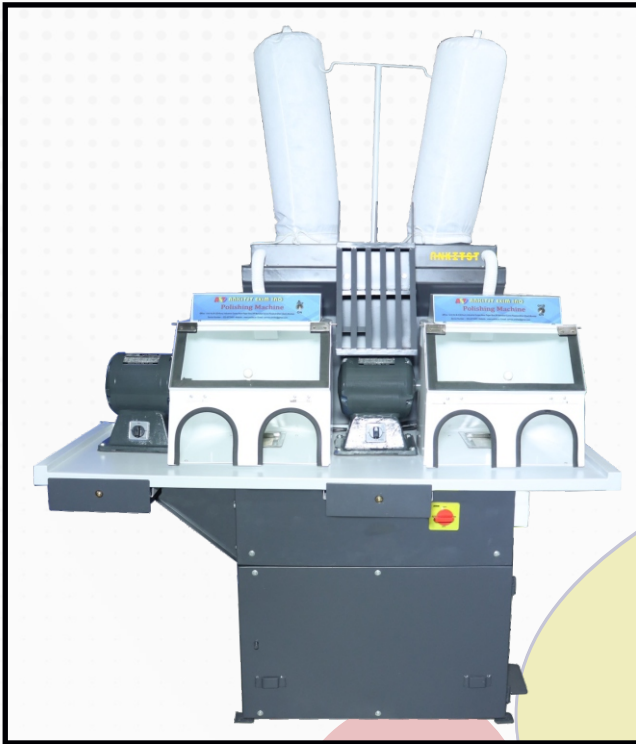

For greater Suction working hoods designed aerodynamically.

Technical Specification:

Particular	Details		
	PRO	ECO	BASIC
Type			
Electrical	3phase, 440volts, 50Hz, 3.5HP	3phase, 440volts, 50Hz, 3HP	3phase, 440volts, 50Hz, 2.5HP
Suction Motor	2HP, 440V.	2HP, 440V.	1.5HP, 440V.
Polishing Motor 2 unit	Single Shaft Spindle, 0.75HP, 2850 rpm 440V.	Single Shaft Spindle, 0.75HP, 2850 rpm 440V.	Single Shaft Spindle, 0.75HP, 2850 rpm 440V.
Working Flow Rate	650 CFM x 2 Ports ±10%	610 CFM x 2 Ports ±10%	500 CFM x 2 Ports ±10%
Filtration	1 st stage 2 x Washable Cloth Bag Filter 2 nd stage paper panel Filter (Happa)	1 st stage 2 x Washable Cloth Bag Filter 2 nd stage paper panel Filter (Happa)	1 st stage 2 x Washable Cloth Bag Filter
Static Pressure (max)	8 Inch w.g	7 Inch w.g	6 Inch w.g
Hand Cushion	PU	PU	PU
Magnifying Glass	Yes	No	No
Silencer	Yes	No	No
Noise Level (max)	72 dB (A)	85 dB (A)	85 dB (A)
Weight	150kg	130kg	130kg
Dimensions	W-132.08 ½" D -71.12" H-136.7"	W-132.08 ½" D -71.12" H-136.7"	W-132.08 ½" D -71.12" H-136.7"

Download Brochure

