



# Wax Injector



## ProM

### Description : *Yihu! Casting*

- The Controller and the wax injection case are separated for heat insulation, and fully fitting technology.
- One thousand program presets.
- RF shooting screen induction, lifting motor
- Temperature control accuracy +0.1C.
- 99% wax injection success rate, one - key exhaust and wax discharge function, digital barometer.
- Pressure value of wax chamber and vacuum is shown on touch screens.
- 1000 groups of programs are shown on touch screens.
- The parameters in programs are quickly called through radio frequency induction card.
- Small-size design for the machine covering smaller areas.

### Technical Specification:

| Particular                      | Details                |
|---------------------------------|------------------------|
| Model                           | ProM                   |
| Voltage                         | AC 220V ±10%, 50 -60Hz |
| Power                           | 500W                   |
| Fuse Specification              | 5A                     |
| Heating Temp. Range of Wax Bath | 0-95°C                 |
| Wax Nozzle Heating Temp. Range  | 0-95°C                 |
| Vacuum Timing Range             | 0-99S                  |
| Wax Injection Timing Range      | 0-99S                  |
| Wax Tank Capacity               | 3KG                    |
| Wax Tank Setting Pressure       | <200KPa                |




Wax Chamber Lid




Control Box



Movable Auto Clamp

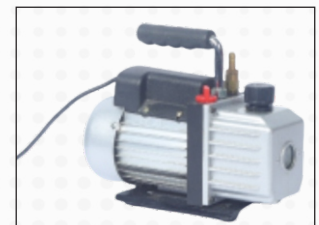

Vacuum Pump

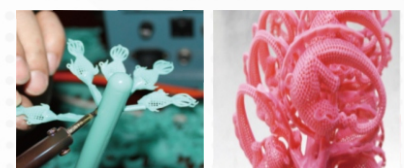

Download Brochure

